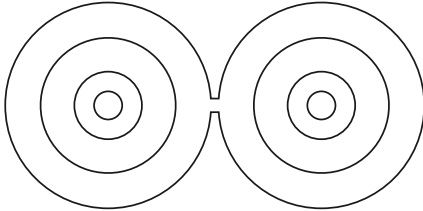


Assembled cable - FO patch cable SC-SC

- multimode glass fiber
- SC duplex connectors

**Assembled cable - FO patch cable SC-SC****Application:**

Use our FO patch cables in switching cabinets or distribution boards - indeed, wherever you need to set up short transmission lines using FO technology in protected environments.

Ordering data

Core 50 µm	Type	Order No.
1 m	IE-FM5Z2VO0001MSD0SD0X	8813300000
2 m	IE-FM5Z2VO0002MSD0SD0X	8813310000
3 m	IE-FM5Z2VO0003MSD0SD0X	8813320000
5 m	IE-FM5Z2VO0005MSD0SD0X	8876350050
10 m	IE-FM5Z2VO0010MSD0SD0X	8876350100
Core 62.5 µm	Type	Order No.
1 m	IE-FM6Z2VO0001MSD0SD0X	8813330000
2 m	IE-FM6Z2VO0002MSD0SD0X	8813340000
3 m	IE-FM6Z2VO0003MSD0SD0X	8813350000
5 m	IE-FM6Z2VO0005MSD0SD0X	8876360050
10 m	IE-FM6Z2VO0010MSD0SD0X	8876360100

Accessories

Type	Order No.
Wire and cable marker, ø 4.7 - 7.4 mm	VT SF 5/21 NEUTRAL WS V0 1689470001
Wire and cable marker, ø 5.8 - 7.8 mm	VT SF 6/21 NEUTRAL WS V0 1730560001
Note	


Technical data

Application	Patch cable
Plug left / Plug right	SC-Duplex / SC-Duplex
Cable layout	Zipcord
Sheath diameter	3*6 mm
Sheath material	PVC
Sheathing color	orange
Operating temperature, min. / max.	-5 °C / 75 °C
Installation temp., min. / max.	-5 °C / 50 °C
Storage temperature, min. / max.	-25 °C / 75 °C

Note:

Assembled cable - FO patch cable ST-ST

- multimode glass fiber
- ST connector

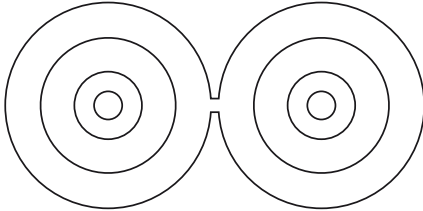

D

Assembled cable - FO patch cable ST-ST

Application:

Use our FO patch cables in switching cabinets or distribution boards - indeed, wherever you need to set up short transmission lines using FO technology in protected environments.

Ordering data

Core 50 µm		Type	Order No.
	1 m	IE-FM5Z2VO0001MST0ST0X	8813240000
	2 m	IE-FM5Z2VO0002MST0ST0X	8813250000
	3 m	IE-FM5Z2VO0003MST0ST0X	8813260000
	5 m	IE-FM5Z2VO0005MST0ST0X	8876370050
	10 m	IE-FM5Z2VO0010MST0ST0X	8876370100
Core 62.5 µm			
	1 m	IE-FM6Z2VO0001MST0ST0X	8813270000
	2 m	IE-FM6Z2VO0002MST0ST0X	8813280000
	3 m	IE-FM6Z2VO0003MST0ST0X	8813290000
	5 m	IE-FM6Z2VO0005MST0ST0X	8876380050
	10 m	IE-FM6Z2VO0010MST0ST0X	8876380100

Accessories

Type	Order No.
Wire and cable marker, ø 4.7 - 7.4 mm	VT SF 5/21 NEUTRAL WS V0 1689470001
Wire and cable marker, ø 5.8 - 7.8 mm	VT SF 6/21 NEUTRAL WS V0 1730560001
Note	


Technical data

Application	Patch cable
Plug left / Plug right	ST / ST
Cable layout	Zipcord
Sheath diameter	3*6 mm
Sheath material	PVC
Sheathing color	orange
Operating temperature, min. / max.	-5 °C / 75 °C
Installation temp., min. / max.	-5 °C / 50 °C
Storage temperature, min. / max.	-25 °C / 75 °C

Note:

Assembled cable - FO patch cable ST-SC

- multimode glass fiber
- adapter cable with ST to SC duplex

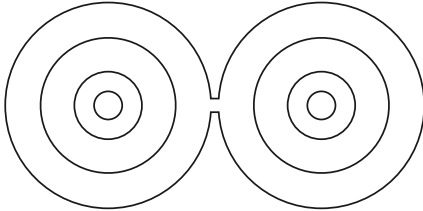

Assembled cable - FO patch cable ST-SC

Application:

Our fiber-optic (FO) adapter cable can be used in the switchgear cabinet, distribution box, or any protected environment where you need to connect SC duplex to ST female connectors.

Ordering data

Core 50 µm	2 m
Core 62.5 µm	2 m

Type	Order No.
IE-FM5Z2VO0002MST0SD0X	8813390000
IE-FM6Z2VO0002MST0SD0X	8813400000

Accessories

Wire and cable marker, ø 4.7 - 7.4 mm
Wire and cable marker, ø 5.8 - 7.8 mm
Note

Type	Order No.
VT SF 5/21 NEUTRAL WS V0	1689470001
VT SF 6/21 NEUTRAL WS V0	1730560001

Technical data

Application	Patch cable
Plug left / Plug right	SC-Duplex / ST
Cable layout	Zipcord
Sheath diameter	3*6 mm
Sheath material	PVC
Sheathing color	orange
Operating temperature, min. / max.	-5 °C / 75 °C
Installation temp., min. / max.	-5 °C / 50 °C
Storage temperature, min. / max.	-25 °C / 75 °C

Note: