

SPECIFICATIONS

Electrical

INPUT	DC	AC
Voltage:	10-36	V8-24 V
Power:	5 W	5 VA
Frequency	N/A	47-63Hz

Temperature

Operating Temperature:	0°C to +60°C
Storage Temperature:	-40 C to +85°C

Mounting

DIN-rail	TS-35
----------	-------

Compliance

CE-
FCC, part 15, Class A
EN50081-2
EN50082-2



Functional

Compliance:	ANSI/IEEE 802.3
Data Rates:	10 /100 Mbps
Signaling:	10BaseT and 100BaseTX

Connectors:	Shielded RJ-45
Segment Length:	100 m (max)


LED- Indicators

Power	green
Activity/ Link	green or yellow
Duplex	green

RJ45 Connector Pin Assignment


Pin Funktion

1	TD+
2	TD-
3	RD+
6	RD-



(All other pins are unused.)

DIMENSIONAL DRAWING

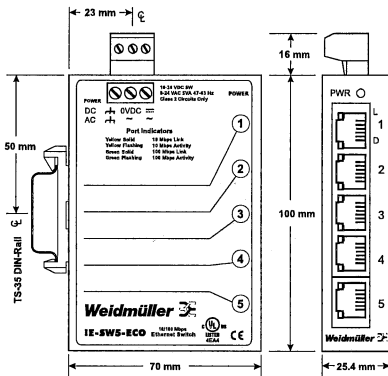

WARRANTY FOR THIS PRODUCT

Weidmueller Interface GmbH & Co KG warrants this product to the original purchaser for five year from the product's shipping date. If a Weidmueller product fails to operate in compliance with its specification during this period, Weidmueller will, at its option, repair or replace the product at no charge. The customer is, however, responsible for shipping the product; Weidmueller assumes no responsibility for the product until it is received. This warranty does not cover repair of products that have been damaged by abuse, accident, disaster, misuse, or incorrect installation. Weidmuellers limited warranty covers products only as delivered. User modification may void the warranty if the modification damages the product, in which case this warranty does not cover repair or replacement.

This warranty in no way warrants suitability of the product for any specific application.

Manufacturer:

Weidmüller Interface GmbH & Co. KG
Klingenbergstrasse 16

32758 Detmold
Germany

DECLARATION OF CONFORMITY

EMC Directive 89/336/EEC as amended by 92/31/EEC & 93/68/EEC; General Product Safety Directive 92/59/EEC
EN 55022:1995 (CISPR22: 1993), Class A; EN 50082-2:1995, EMC - Part 2: Industrial Environment